

# CENTRICAST® RB-1520 PIPING SYSTEMS



**NOV Fiber Glass Systems** is the combination of the **Star® Fiberglass** product line and the **Smith Fibercast®** product lines bringing over 60 years of “Time-Tested” composite pipe experience to the Oilfield, Chemical/Industrial, Petroleum Marketing, Marine and Offshore markets.

## PRODUCT

**Centricast RB-1520** pipe is manufactured with high strength glass fabrics and our highly resilient formulation of aromatic amine cured epoxy resin. A 50 mil integral corrosion barrier of pure resin provides excellent corrosion resistance. It is recommended for most caustics, salts, solvents, many acids and chemical process solutions up to 225°F. **Centricast RB-1520** proprietary resin formulation also provides the toughness for many corrosive types of slurry. Pipe and fittings are available in 1½”-14” with static pressure ratings up to 150 psig, with higher pressure ratings in smaller sizes. **Centricast RB-1520** comes in 20’ nominal or exact lengths.

## EXTERNAL BARRIER

A 10 mil resin-rich reinforced external corrosion barrier provides excellent corrosion resistance and protection from ultraviolet (UV) radiation. NOV Fiber Glass Systems warrants **Centricast RB-1520** pipe and fittings against UV degradation of physical properties and chemical resistance for 15 years.

## FITTINGS

Compatible epoxy fittings are manufactured with the same chemical/ temperature capabilities as the pipe. The fabrication process is dependent on the fitting type and size. Fittings are manufactured by compression molding, contact molding or filament winding.

- Fittings Literature  
A1390-Standard 1½”-14”

## JOINING METHODS

An adhesive bonded socket connection with positive stops in the fittings is standard and simplifies close tolerance piping installation. A high strength adhesive with the same chemical resistance and temperature capabilities is used to bond the pipe and fittings. See **Manual No. F6080 “Pipe Installation Handbook”** for detailed installation instructions and fabrication techniques.

## RECOMMENDED SERVICES

**Centricast RB-1520** epoxy resin pipe is excellent for many chemical and slurry applications including caustics, acids, salts, solvents and process solutions that corrode traditional metal pipe. Refer to **Manual No. E5615 “Chemical Resistance Guide”** for proper application.

## BENEFITS

The excellent chemical resistance of the **RB-1520** piping system provides longer service life than traditional piping materials. **RB-1520** pipe performance conveying chemical mixtures and hot caustics is particularly exceptional resulting in a reduction in maintenance and replacement costs.

## DISTRIBUTION

NOV Fiber Glass Systems has a network of stocking distributors across the U.S. as well as representatives and distributors in many other parts of the world. These distributors are supported by a staff of experienced technical personnel at the home office and by highly trained, strategically located field personnel.



## PRODUCT DATA

### Nominal Dimensional Data

Pipe Size (In)	I.D.		O.D.		Wall Thickness		Reinforcement Thickness		Weight		Capacity	
	(In)	(mm)	(In)	(mm)	(In)	(mm)	(In)	(mm)	(Lbs/Ft)	(kg/m)	(Gal/Ft)	(CuFt/Ft)
1 1/2	1.55	39.4	1.90	48.3	0.18	4.4	0.12	2.9	0.58	0.86	0.10	0.013
2	2.06	52.2	2.38	60.3	0.16	4.1	0.10	2.5	0.68	1.01	0.17	0.023
3	3.18	80.8	3.50	88.9	0.16	4.1	0.10	2.5	1.03	1.53	0.41	0.055
4	4.18	106.2	4.50	114.0	0.16	4.1	0.10	2.5	1.34	1.99	0.71	0.095
6	6.27	159.0	6.63	168.0	0.18	4.6	0.12	3.0	2.23	3.32	1.60	0.214
8	8.23	209.0	8.63	219.0	0.20	5.1	0.14	3.6	3.24	4.82	2.76	0.369
10	10.30	262.0	10.75	273.0	0.22	5.6	0.16	4.1	4.45	6.63	4.34	0.580
12	12.30	312.0	12.75	324.0	0.24	6.1	0.18	4.6	5.77	8.59	6.14	0.821
14	13.50	343.0	14.00	356.0	0.24	6.1	0.18	4.6	6.35	9.45	7.46	0.997

Tolerances or maximum/minimum limits can be obtained from NOV Fiber Glass Systems.

#### ASTM D2997 Designation Codes

1 1/2"-4"	RTRP-21CW-4556
6"	RTRP-21CW-4555
8"	RTRP-21CW-4554
10"-12"	RTRP-21CW-4553
14"	RTRP-21CW-4552

#### Pipe Lengths Available\*

Size (In)	Random Length (Ft)
1 1/2-14	20
*Pipe is offered in random or exact lengths from 18.0 to 20.4 feet long.	

### Pressure Ratings for Uninsulated Piping Systems<sup>(1)(2)</sup>

Pipe Size (In)	Maximum Internal Pressure @ 225°F (psig)			Maximum External Pressure <sup>(6)</sup>		
	Socket Pressure Fittings <sup>(3)</sup>	Flanged Pressure Fittings <sup>(4)</sup>	Other Pressure Fittings <sup>(5)</sup>	75°F	150°F	225°F
				75°F	150°F	225°F
1 1/2	300	150	NA	920	753	649
2	300	150	125	290	231	199
3	275	150	125	103	104	90
4	150	150	100	47	37	32
6	150	150	100	22	18	16
8	150	150	100	19	12	11
10	150	150	75	12	10	8
12	150	150	75	7	6	5
14	125	150	-	7	6	5

(1) Static pressure ratings, typically created with use of a gear pump, turbine pump, centrifugal pump, or multiplex pump having 4 or more pistons or elevation head.

(2) For insulated and/or heat traced piping systems, use 100% of the uninsulated piping recommendations up to 200°F and reduce these ratings 50% for 200°F to 225°F operating temperatures. **Centricast RB-1520** pipe and epoxy fittings can be used in drainage and vent systems up to 250°F operating temperatures. For compressible gasses consult the factory for pressure ratings. Heat cured adhesive joints are highly recommended for all piping systems carrying fluids at temperatures above 120°F.

(3) Socket elbows, tees, reducers, couplings, flanges and nipples joined with **WELDFAST ZC275** adhesive.

(4) Flanged elbows, tees, reducers, couplings and nipples assembled at factory.

(5) Laterals, crosses, and saddles.

(6) Ratings shown are 50% of ultimate; 14.7 psi external pressure is equal to full vacuum.

### Average Physical Properties

Property	75°F psi	24°C MPa	200°F psi	99°C MPa	225°F psi	107°C MPa
<b>Axial Tensile - ASTM D2105</b>						
Ultimate Stress	30,000	210	26,000	180	25,000	170
Design Stress	7,500	52	6,500	45	6,250	43
Modulus of Elasticity	2.5x10 <sup>6</sup>	17,200	2.2x10 <sup>6</sup>	15,200	2.1x10 <sup>6</sup>	14,500
<b>Poisson's Ratio V</b>	0.15		0.15		0.15	
<b>Axial Compression - ASTM D695</b>						
Ultimate Stress	35,000	240	28,000	190	17,000	110
Design Stress	8,750	60	7,000	48	4,250	29
Modulus of Elasticity	3.2x10 <sup>6</sup>	22,000	2.8x10 <sup>6</sup>	19,300	2.7x10 <sup>6</sup>	18,600
<b>Beam Bending - ASTM D2925</b>						
Ultimate Stress	40,000	280	35,000	240	33,000	230
Design Stress <sup>(1)</sup>	5,000	34	4,375	30	4,125	28
Modulus of Elasticity (Long Term)	3.7x10 <sup>6</sup>	26,000	3.2x10 <sup>6</sup>	22,000	3.1x10 <sup>6</sup>	21,000
<b>Hydrostatic Burst - ASTM D1599</b>						
Ultimate Hoop Tensile Stress	30,000	210	26,000	180	25,000	170
Hoop Tensile Modulus of Elasticity	2.4x10 <sup>6</sup>	17,000	2.1x10 <sup>6</sup>	14,500	2.0x10 <sup>6</sup>	13,800
<b>Hydrostatic Design - ASTM D2992, Procedure B - Hoop Tensile Stress Static 50 Year @ 75°F</b>	19,270	130	-	-	-	-

<sup>(1)</sup> Stress and modulus values can be interpolated between temperatures shown.

### Coefficient of Linear Thermal Expansion - ASTM D696

Non-Insulated Pipe:  $9.6 \times 10^{-6}$  in/in/°F •  $17.4 \times 10^{-6}$  mm/mm/°C  
 Insulated Pipe:  $13.0 \times 10^{-6}$  in/in/°F •  $23.5 \times 10^{-6}$  mm/mm/°C

### Thermal Conductivity

0.07 BTU/hr-ft-°F • 0.04 W/-m-°C

### Specific Gravity - ASTM D792

1.41

### Flow Factor - SF / Hazen-Williams Coefficient

150

### Absolute Surface Roughness

0.00021 Inch • 0.0053 mm

### Manning's Roughness Coefficient, n

0.009

### Properties of Pipe Sections Based on Minimum Reinforced Walls

Size (In)	Reinforcement End Area (In <sup>2</sup> )	Reinforcement Moment of Inertia (In <sup>4</sup> )	Reinforcement Section Modulus (In <sup>3</sup> )	Nominal Wall End Area (In <sup>2</sup> )
1½	0.67	0.27	0.28	0.97
2	0.71	0.46	0.39	1.11
3	1.07	1.54	0.88	1.68
4	1.38	3.35	1.49	2.18
6	2.45	13.00	3.92	3.64
8	3.73	33.60	7.79	5.29
10	5.32	74.60	13.90	7.28
12	7.11	140.00	22.00	9.43
14	7.82	187.00	26.70	10.40

## Recommended Operating Ratings

Size (In)	Axial Tensile Loads Max. (Lbs)		Axial Compressive Loads Max. (Lbs) <sup>(1)</sup>		Bending Radius Min. (Ft) Entire Temp. Range	Torque Max. (Ft Lbs) Entire Temp. Range	Parallel Plate Loading ASTM D2412		
	Temperature @ 75°F	Temperature @ 225°F	Temperature @ 75°F	Temperature @ 225°F			Stiffness Factor In <sup>3</sup> Lbs/In <sup>2</sup>	Pipe Stiffness (psi)	Hoop Modulus x10 <sup>6</sup> (psi)
1½	5,000	4,100	5,800	2,800	59	113	279	2,632	2.2
2	5,400	4,500	6,300	3,000	73	163	317	1,444	3.8
3	8,000	6,700	9,300	4,500	108	368	317	433	3.8
4	10,400	8,600	12,100	5,900	139	620	317	200	3.8
6	18,400	15,300	21,500	10,400	204	1,632	547	107	3.8
8	28,000	23,300	32,700	15,900	266	3,246	709	62	3.1
10	39,900	33,300	46,600	22,600	331	5,786	1,195	54	3.5
12	53,300	44,400	62,200	30,200	393	9,178	1,701	46	3.5
14	58,600	48,800	68,400	33,200	432	11,108	1,701	35	3.5

<sup>(1)</sup> Compressive loads are for short columns only. Buckling loads must be calculated when applicable.

## SUPPORTS

Proper pipe support spacing depends on the temperature and weight of the fluid in the pipe. The support spacing table is based on unrestrained continuous beam theory using the pipe bending modulus derived from long-term beam bending tests. The maximum spans lengths were developed to ensure a design that limits mid-span deflection to ½ inch and dead weight bending to 1/8 of the ultimate bending stress. Any additional loads on the piping system such as insulation, wind, seismic, etc. requires further consideration. Restrained (anchored) piping systems operating at elevated temperatures may result in guide spacing requirements that are shorter than unrestrained piping systems. In this case, the maximum guide spacing governs the support span requirements for the system. Pipe spans near elbows require special attention. Both supported and unsupported elbows are considered in the following tables and must be followed to properly design the piping system.

There are seven basic rules to follow when designing piping system supports:

1. Do not exceed the recommended support span.
2. Support heavy valves and in-line equipment independently.
3. Protect pipe from external abrasion at supports.
4. Avoid point contact loads.
5. Avoid excessive bending. This applies to handling, transporting, initial layout, and final installed position.

6. Avoid excessive vertical loading to minimize bending stress on pipe and fittings.
7. Provide adequate axial and lateral restraint to ensure line stability during rapid changes in flow.

### Maximum Support Spacing for Uninsulated Pipe<sup>(1)</sup>

Pipe Size (In.)	Continuous Spans of Pipe (Ft.) <sup>(2)</sup>			
	75°F	150°F	225°F	Gas 75°F
1½	16.6	16.0	15.9	20.7
2	17.3	16.7	16.6	23.0
3	19.4	18.7	18.6	28.1
4	20.9	20.1	20.0	31.9
6	24.2	23.3	23.2	39.3
8	26.9	26.0	25.8	45.5
10	29.5	28.4	28.2	51.3
12	31.7	30.6	30.4	56.3
14	32.5	31.4	31.4	59.0

<sup>(1)</sup> Consult factory for insulated pipe support spacing.


<sup>(2)</sup> Maximum mid-span deflection ½" with a specific gravity of 1.0.

Support Spacing vs. Specific Gravity							
Specific Gravity	3.00	2.00	1.50	1.25	1.00	0.75	Gas/Air
Multiplier	0.76	0.84	0.90	0.95	1.00	1.07	1.40

Example: 6" pipe @ 150°F with 1.5 specific gravity fluid, maximum support spacing = 23.3 x 0.90 = 21.0 ft.

### Piping Span Adjustment Factors With Unsupported Fitting at Change in Direction


Span Type	Factor
a Continuous interior or fixed end spans	1.00
b Second span from simple supported end or unsupported fitting	0.80
c + d Sum of unsupported spans at fitting	≤ 0.75*
e Simple supported end span	0.67

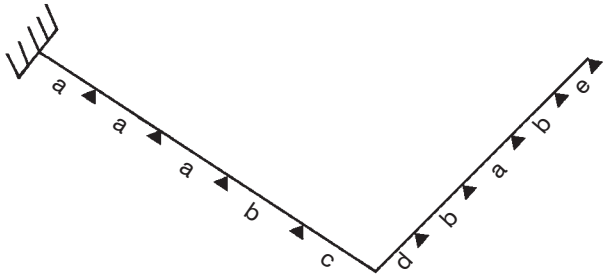

\* For example: If continuous support span is 10 ft., c + d must not exceed 7.5 ft. (c = 3 ft. and d = 4.5 ft. would satisfy this condition).

### Piping Span Adjustment Factors With Supported Fitting at Change in Direction

Span Type	Factor
a Continuous interior or fixed end spans	1.00
b Span at supported fitting or span adjacent to a simple supported end	0.80
e Simple supported end span	0.67

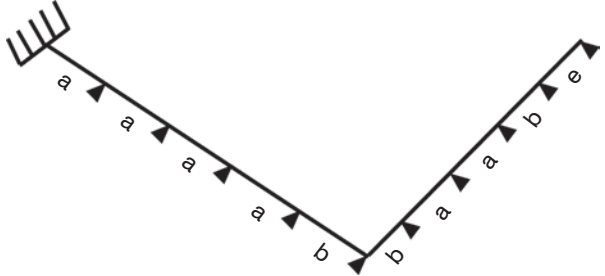

## THERMAL EXPANSION

The effects of thermal gradients on piping systems may be significant and should be considered in every piping system stress analysis. Pipe line movements due to thermal expansion or contraction may cause high stresses or even buckle a pipe line if improperly restrained. Several piping system designs are used to manage thermal expansion and contraction in above ground piping systems. They are listed below according to economic preference:

1. Use of inherent flexibility in directional changes
2. Restraining axial movements and guiding to prevent buckling
3. Use expansion loops to absorb thermal movements
4. Use mechanical expansion joints to absorb thermal movements

To perform a thermal analysis the following information is required:

1. Isometric layout of piping system
2. Physical and material properties of pipe
3. Design temperatures

4. Installation temperature (final tie-in temperature)
5. Terminal equipment load limits
6. Support movements

A comprehensive review of temperature effects on fiberglass pipe may be found in Fiber Glass Systems' "Engineering and Piping Design Guide", Manual No. E5000, Section 3.

Change in Temperature °F	Pipe Change In Length (In/100 Ft)
25	0.29
50	0.58
75	0.86
100	1.15
125	1.44
150	1.73
175	2.02
200	2.30

## Restrained Thermal End Loads and Guide Spacing

Operating Temperature °F (Based on Installation Temperature of 75°F)										
Size (In)	125		150		175		200		225	
	Guide Spacing (Ft)	Thermal End Load (Lbs)	Guide Spacing (Ft)	Thermal End Load (Lbs)	Guide Spacing (Ft)	Thermal End Load (Lbs)	Guide Spacing (Ft)	Thermal End Load (Lbs)	Guide Spacing (Ft)	Thermal End Loads (Lbs)
1½	8.2	982	6.6	1,440	5.6	1,862	4.9	2,255	4.4	2,609
2	10.5	1,046	8.4	1,533	7.1	1,983	6.2	2,401	5.6	2,779
3	15.6	1,564	12.6	2,292	10.6	2,963	9.3	3,589	8.4	4,153
4	20.2	2,024	16.3	2,966	13.8	3,835	12.0	4,645	10.8	5,374
6	29.9	3,590	24.0	5,262	20.4	6,804	17.8	8,240	16.0	9,535
8	39.0	5,463	31.4	8,007	26.6	10,354	23.2	12,539	20.9	14,510
10	48.6	7,793	39.1	11,421	33.2	14,768	29.0	17,886	26.0	20,696
12	57.7	10,406	46.5	15,251	39.4	19,721	34.4	23,883	30.9	27,637
14	63.4	11,441	51.1	16,768	43.3	21,682	37.8	26,528	34.0	30,385

Allowable Bending Movement 90° Elbow			
Nominal Pipe Size (In)	Allowable Movement (Ft•Lbs)	Nominal Pipe Size (In)	Allowable Movement (Ft•Lbs)
1½	150	8	2,850
2	225	10	4,500
3	475	12	6,500
4	650	14	10,000
6	1,650		

## OTHER CONSIDERATIONS

### Testing:

See NOV Fiber Glass Systems' **Manual No. F6080, "Pipe Installation Handbook: Hydrostatic Testing and System Startup."**

When possible, the piping system should be hydrostatically tested prior to beginning service. Care should be taken when testing as in actual installation, to avoid water hammer. **All anchors, guides and supports must be in place prior to testing the line.**

Test pressure should not be more than 1½ times the working pressure of the piping system and never exceed 1½ times the rated operating pressure of the lowest rated component in the system.

### Water Hammer:

Care should be taken when designing an FRP piping system to eliminate sudden surges. Soft start pumps and slow actuating valves should be considered.

## APPROVALS



## **SALES OFFICES**

### **North America**

2700 West 65th Street  
Little Rock, AR 72209  
Phone: 501 568 4010  
Fax: 501 568 4465

25 S. Main Street  
Sand Springs, OK 74063  
Phone: 918 245 6651  
Fax: 918-245 7566

### **Canada**

30 Strathlea Crescent SW  
Calgary, Alberta Canada T3H 5A8  
Phone: 403 660 4131  
Fax: 403 246 7850

### **Latin America (North Zone)**

2425 SW 36th Street  
San Antonio, Texas 78237  
Phone: 210 896 4438  
Fax: 210 434 7543

### **Latin Amrtica (Mercosul)**

Albano de Carvalho #400  
Officina 301  
Recreio dos Bandeirantes  
Rio de Janeiro 22795-380  
Phone: 55 21 88619170

### **Central Asia / Russia**

Microdistrict-13, Bldg-23, Apt. 4  
Mangistau Region  
Aktau, Kazakhstan  
Phone: 7 701 5141087  
Fax: 7 7292 436176

### **Middle East**

PO Box 61335  
Jafza View 18, Office 0506  
Jebel Ali Free Zone  
Dubai, United Arab Emirates  
Phone: 9714 886 5660  
Fax: 9714 886 5670

### **Pacific Rim**

10 Ubi Crescent  
#02-93 Ubi Techpark (Lobby E)  
Singapore 408564  
Phone: 65 6842 2293  
Fax: 65 6741 2293

### **China**

6 Ning Bo Road, Haping Road  
Centralized, Industrial Park,  
Harbin Development Zone  
Harbin China 150060  
Phone: 86 451 8709 1718  
Fax: 86 451 8709 1719

Litanghe Road  
Xiangcheng Economic Development  
Zone  
Suzhou, China 215131  
Phone: 86 512 8518 0099  
Fax: 86 512 8512 0101

### **Europe**

Dlha 27  
Nesvady 94651  
Slovakia  
Phone: 42 191 836 0122

### **West Africa**

P.O. Box 14148  
Chioma Loveday Flats,  
Chief Ogbonda's Compound, #105  
Woji Road  
Woji, Port Harcourt, RV 500001  
Nigeria  
Phone: 234 803 338 2623  
Fax: 215 252 5140

## **MANUFACTURING FACILITIES**

San Antonio, Texas USA

Big Spring, Texas USA

Wichita, Kansas USA

Little Rock, Arkansas USA

Sand Springs, Oklahoma USA

Harbin, China

Suzhou, China

**Downhole Solutions**

**Drilling Solutions**

**Engineering and Project Management Solutions**

**Lifting and Handling Solutions**

**Production Solutions**

**Supply Chain Solutions**

**Tubular and Corrosion Control Solutions**

**Well Service and Completion Solutions**

## **Headquarters**

2425 SW 36th Street  
San Antonio, Texas 78237 USA  
Phone: 210 434 5043  
Fax: 210 434 7543

*National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility. All brands listed are trademarks of National Oilwell Varco.*

**NOV Fiber Glass Systems**

**One Company . . . Unlimited Solutions**

[fgspipe@nov.com](mailto:fgspipe@nov.com)

[www.fgspipe.com](http://www.fgspipe.com)